




Tuff Stack Advantages

- **Rigid & Reliable Strength.** UN/DOT certified Title CFR 49 UN31H2 for Packing Groups II and III hazardous and non-hazardous materials. Rotationally molded using industrial-grade corrosion-free HDPE to have thick, durable walls and high impact strength.
- **Easy to Use.** Molded-in and inked volume markers are added for approximate filling and product level monitoring. The sloped bottom maximizes drainage, reducing product waste. The valve area is easily accessible by operators, and Tuff Series totes stack seamlessly with other brands.
- **Cost Efficient & Low Impact.** Returnable IBC tanks are constructed for reuse over many years, designed for multiple and repeated turns. Investing in a fleet of asset tanks delivers a higher ROI and reduces waste compared to one-way containers.



Tuff Stack Features

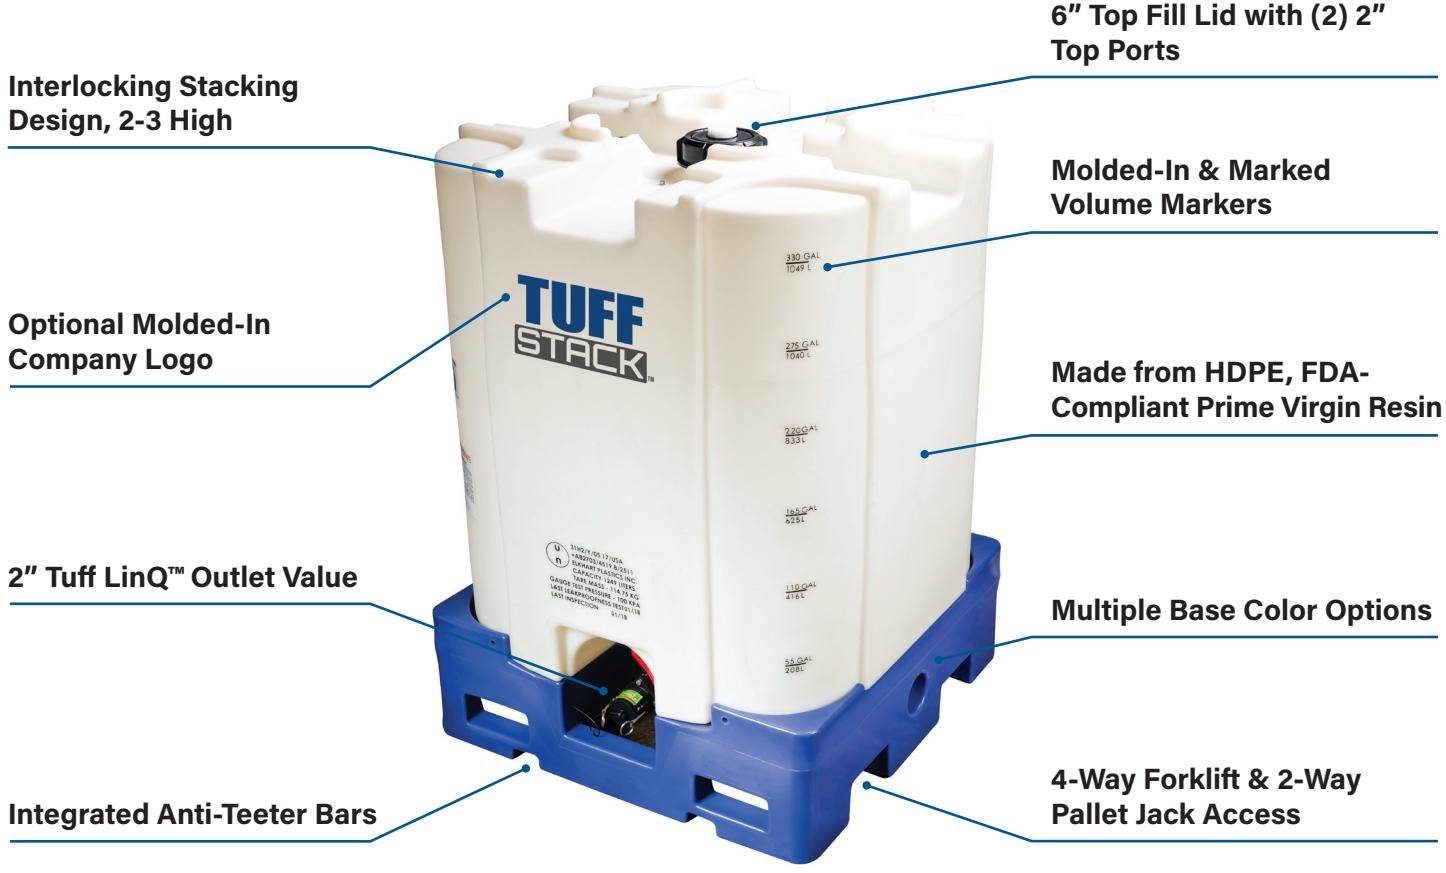

Markets We Service



Agricultural



Water Treatment



Metal Treatment



Industrial Chemicals



Paint & Coating



Oil & Gas

Specification Chart

Model	Size	Tare WT
120 Gallon	45" x 45" x 36"	185 Lbs
220 Gallon	45" x 45" x 48"	215 Lbs
275 Gallon	45" x 45" x 56"	235 Lbs
330 Gallon	45" x 45" x 64"	255 Lbs

UN/DOT Certified, Title 49 UN31H2, 1.9 specific gravity,
Measured in gallons and liters

Contact to Order

574.825.9797

ibc.sales@epi-roto.com

tuffseriesibc.com